


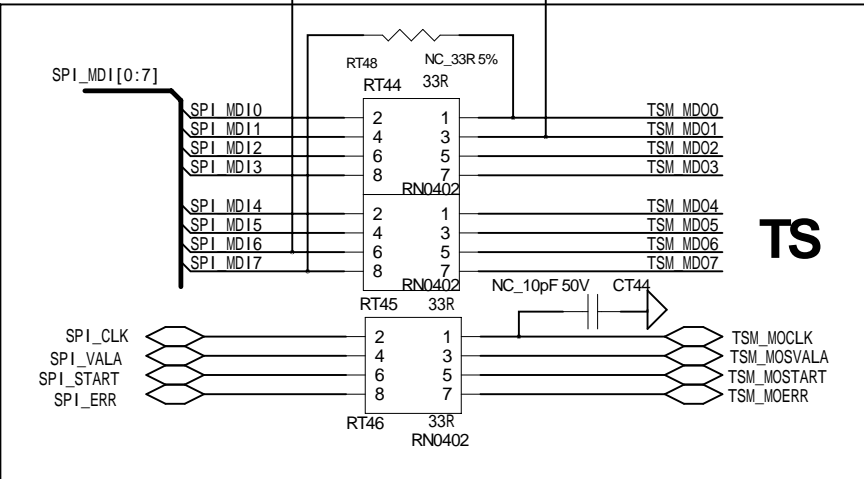
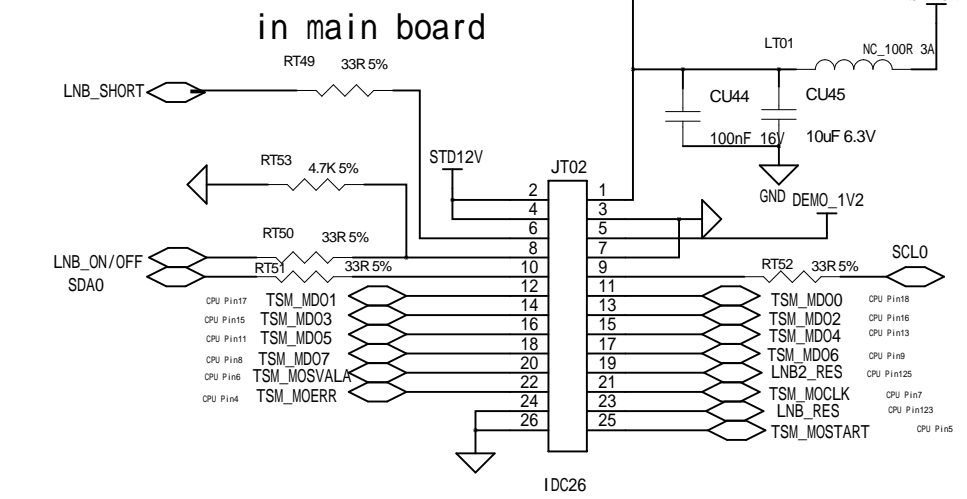
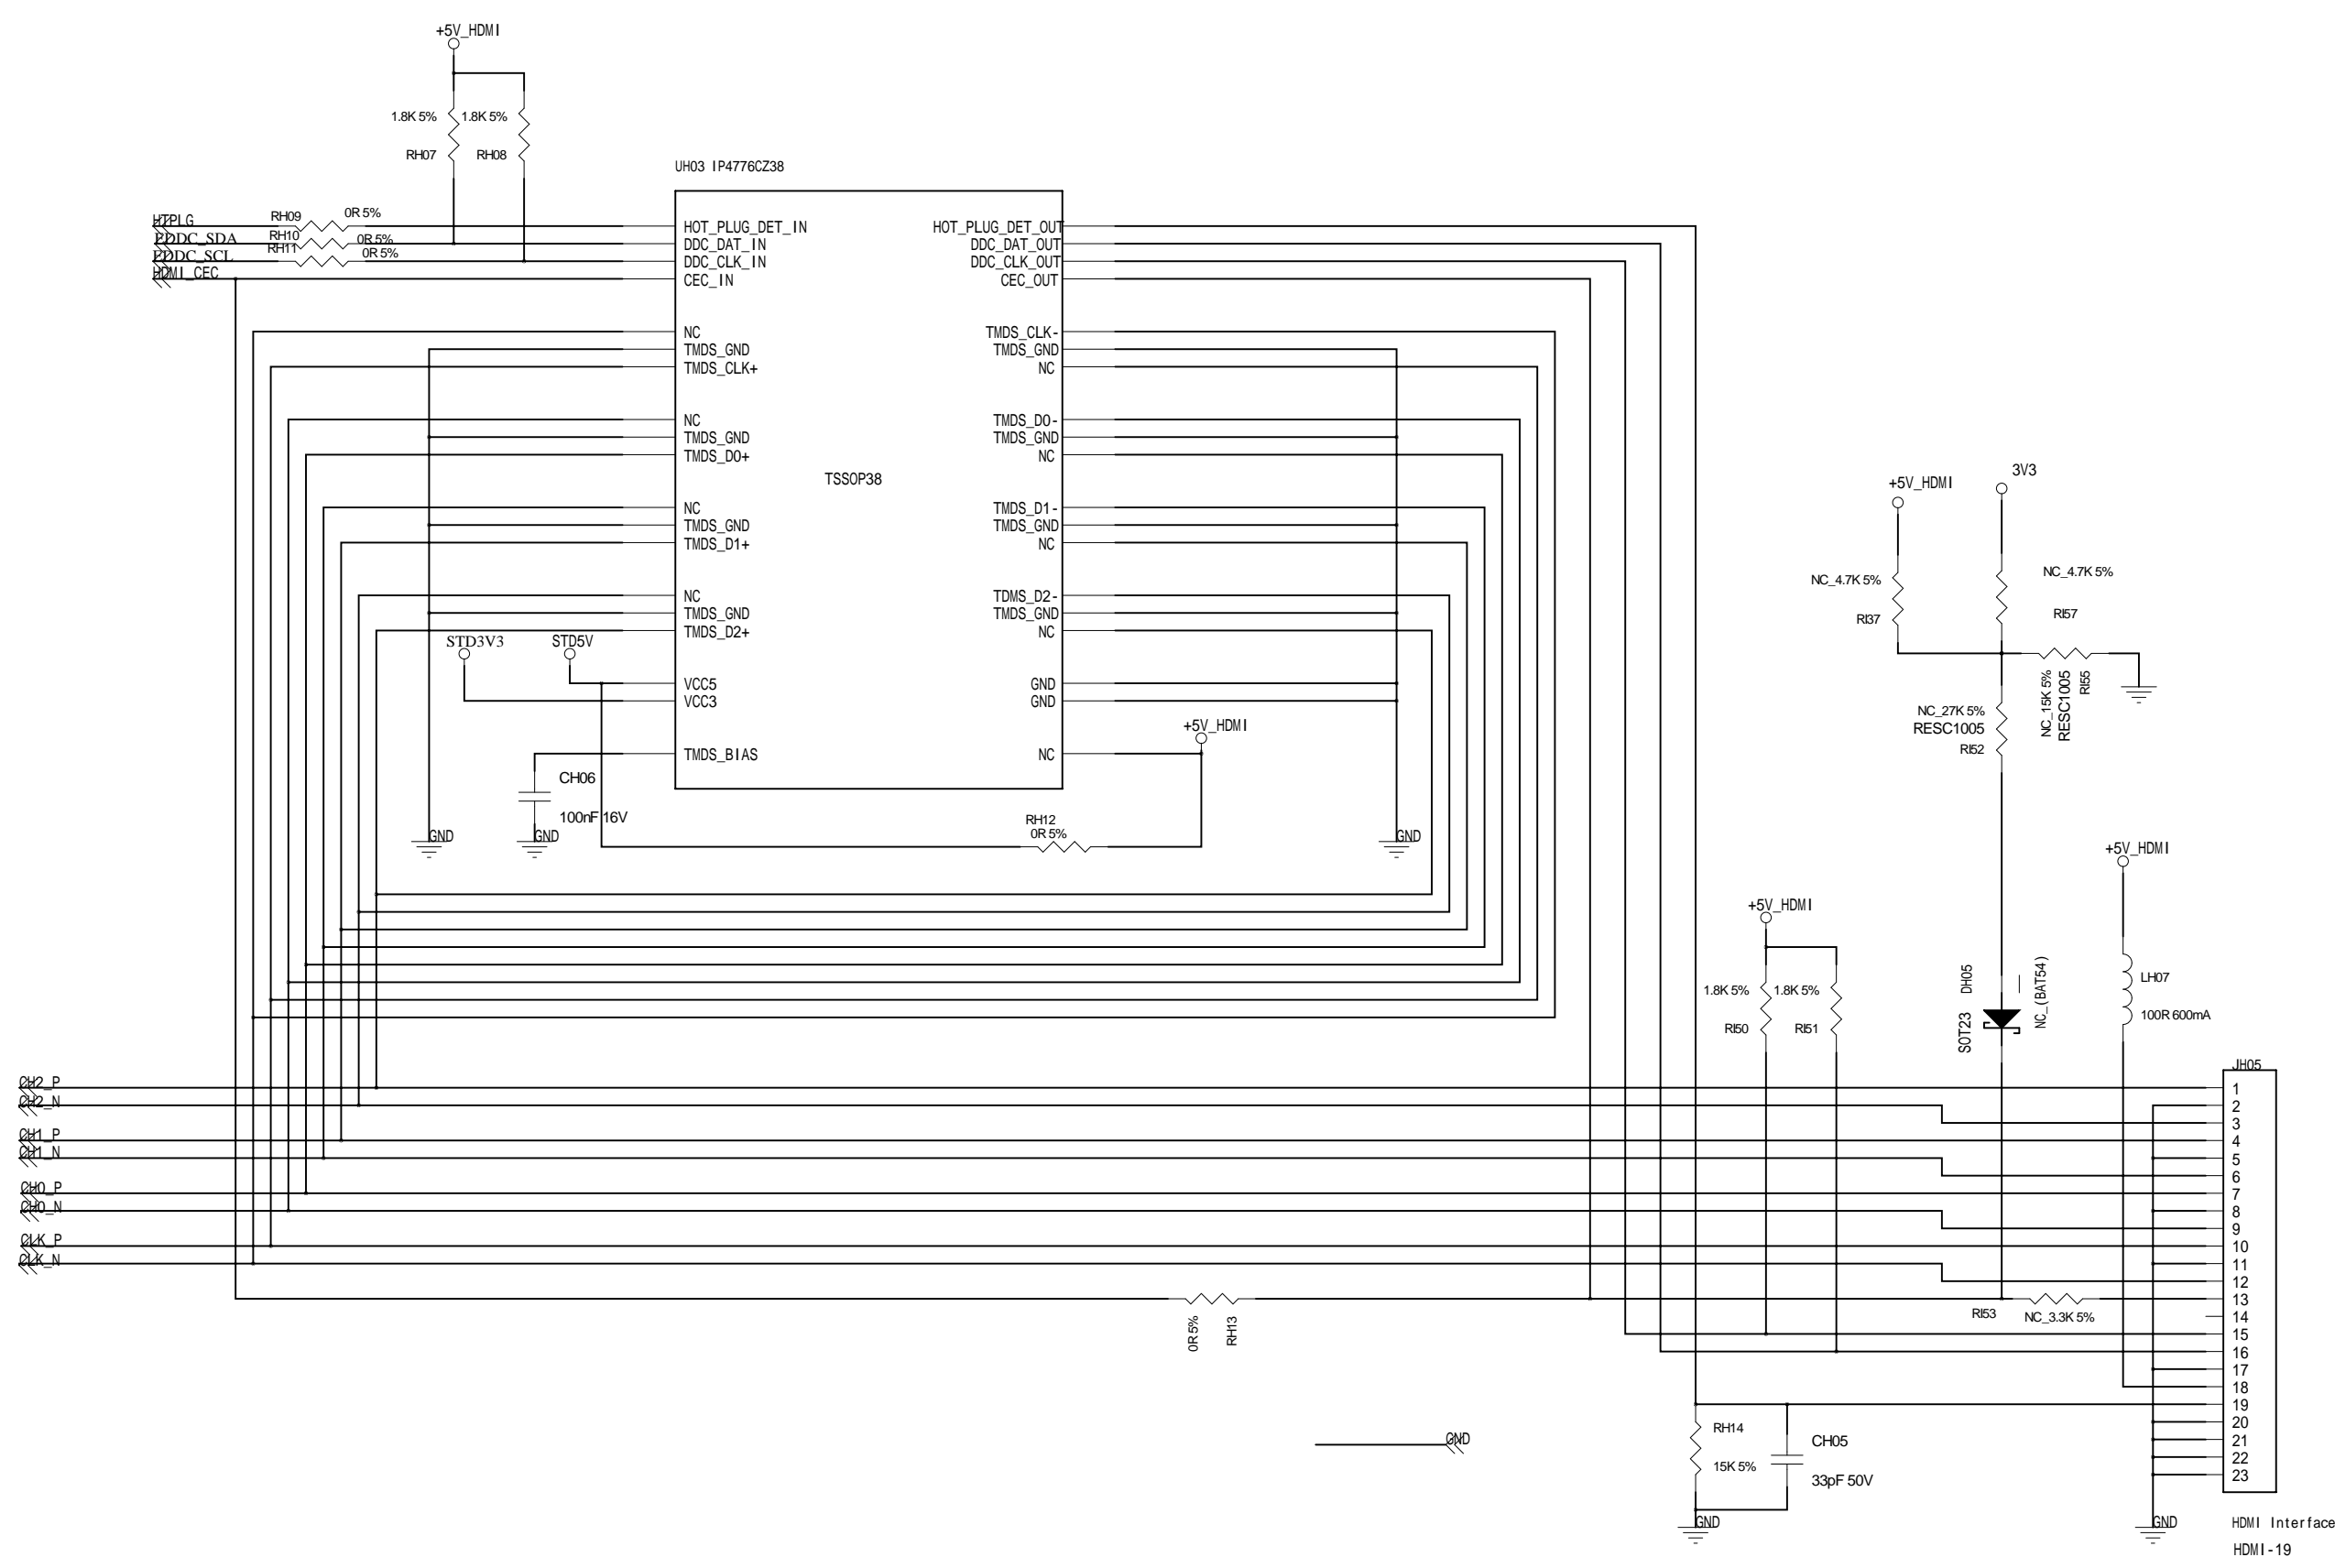
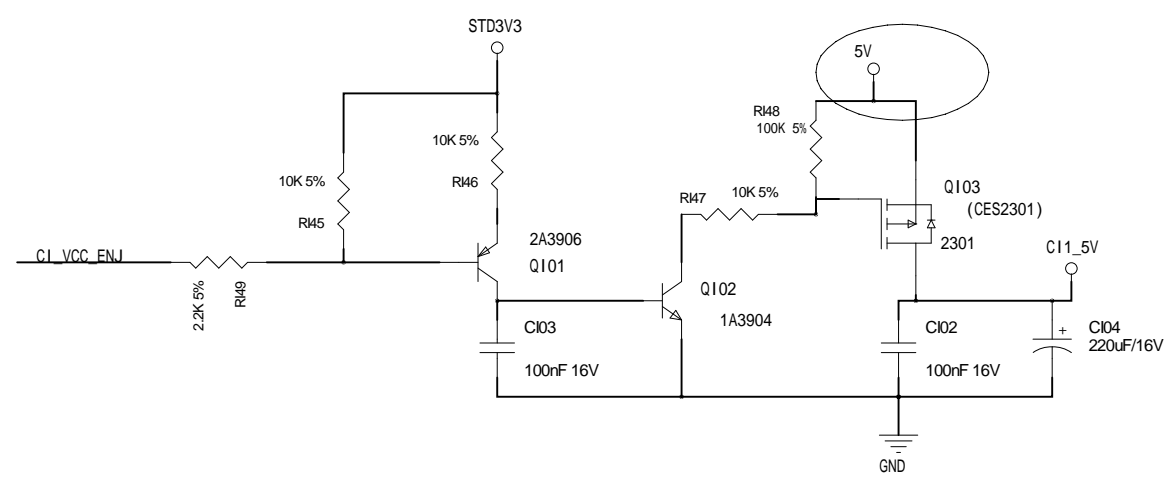
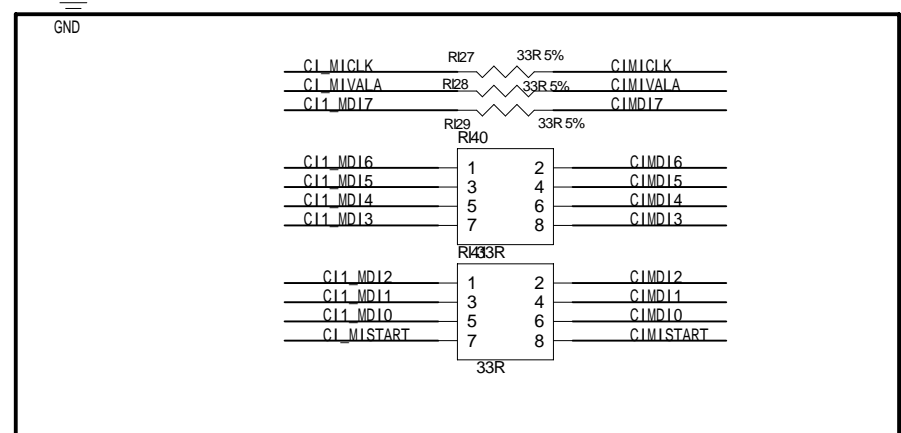
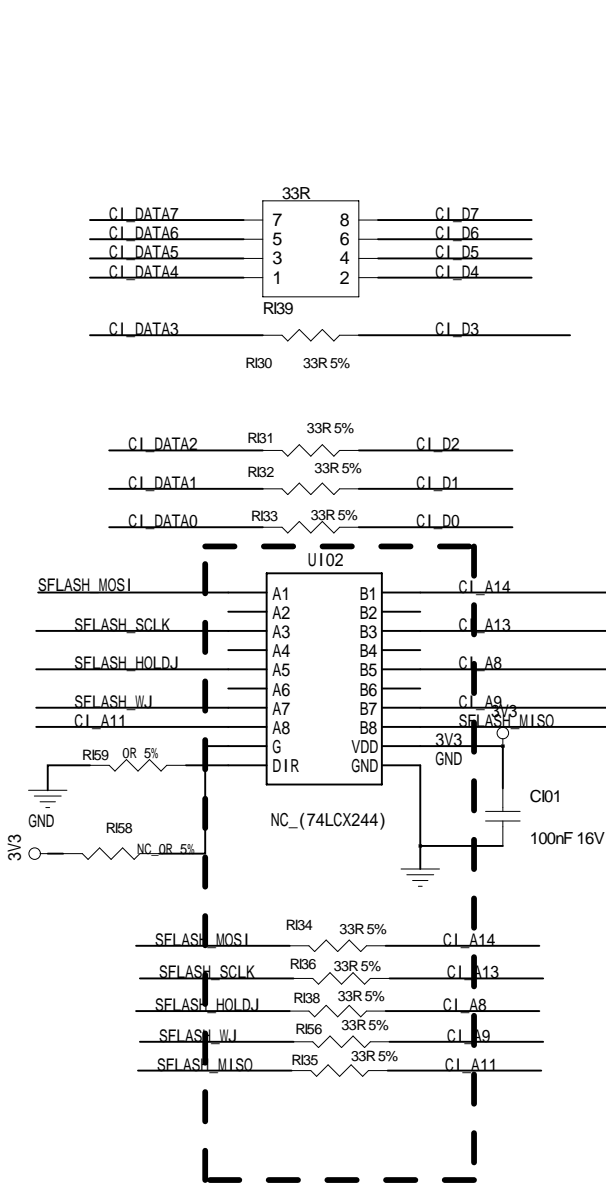



1:Probe enable

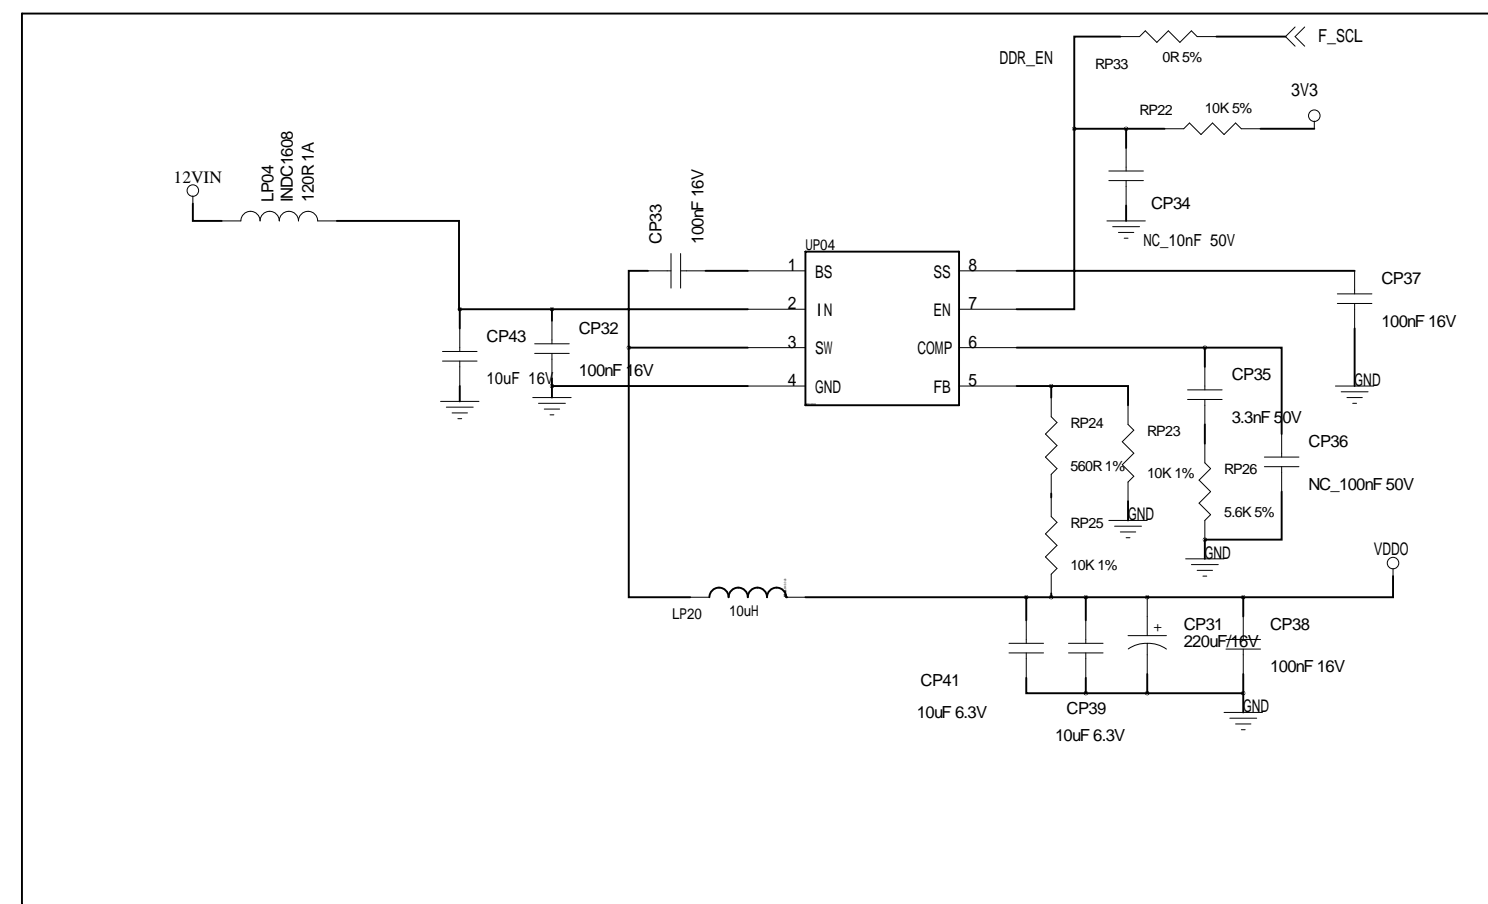

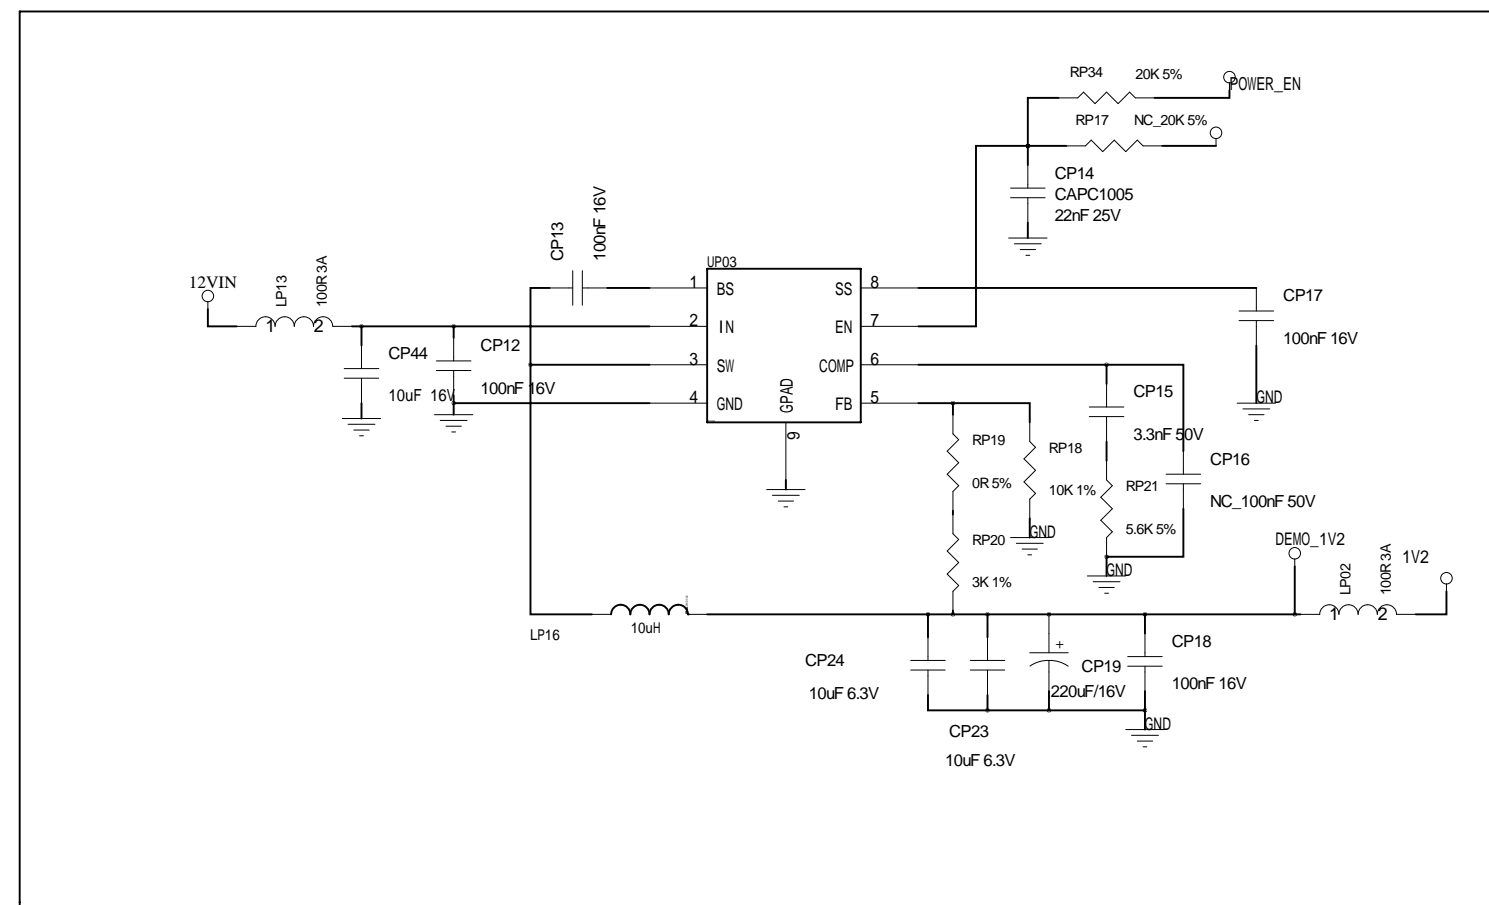


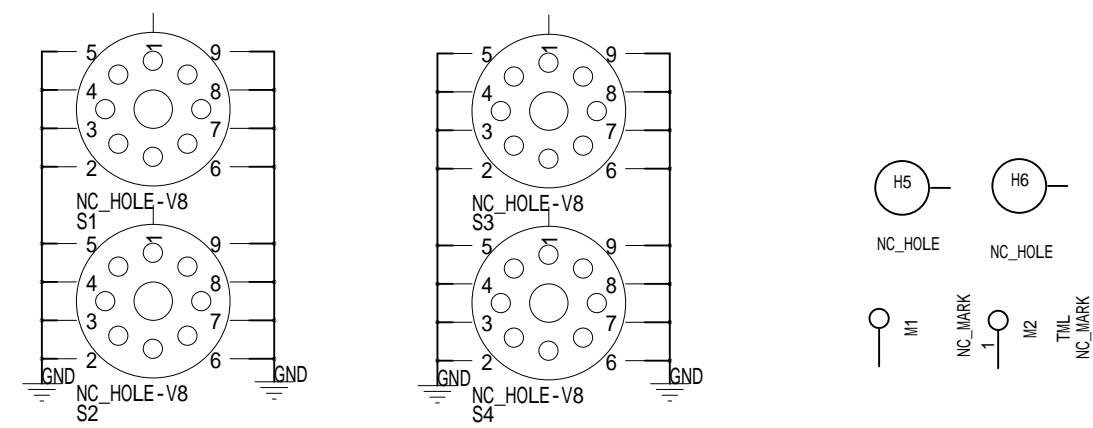


VIDEO

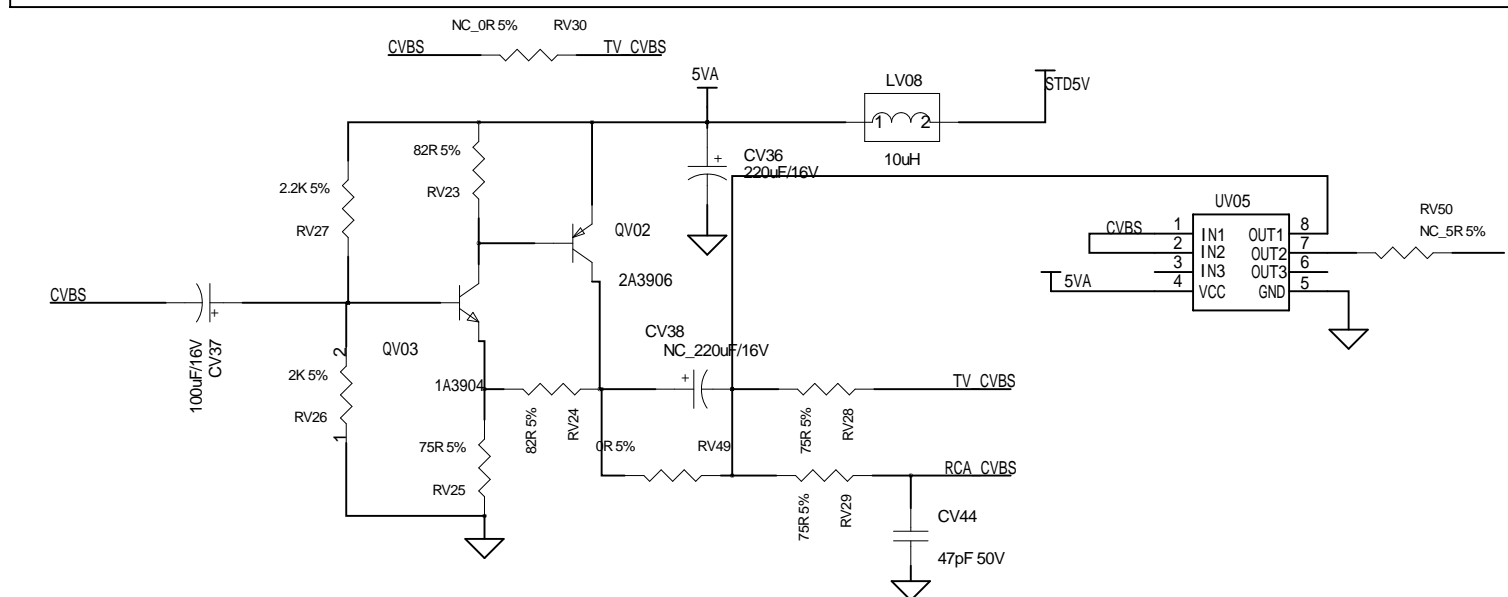

TV SCART

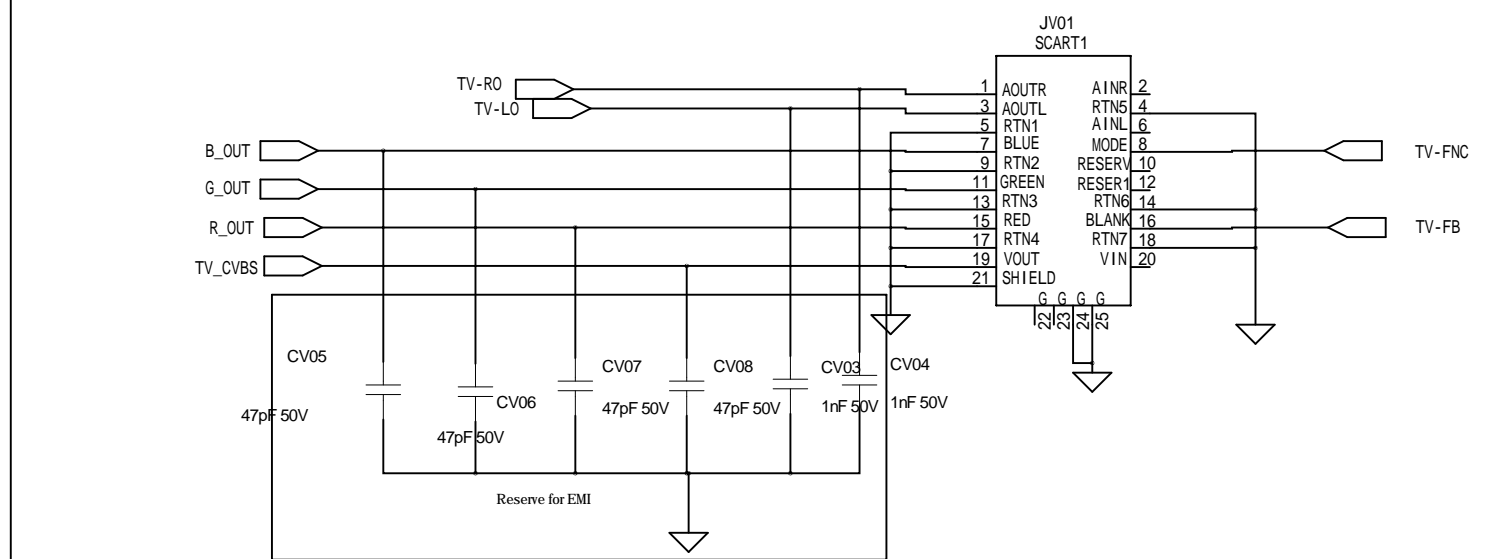




AUDIO

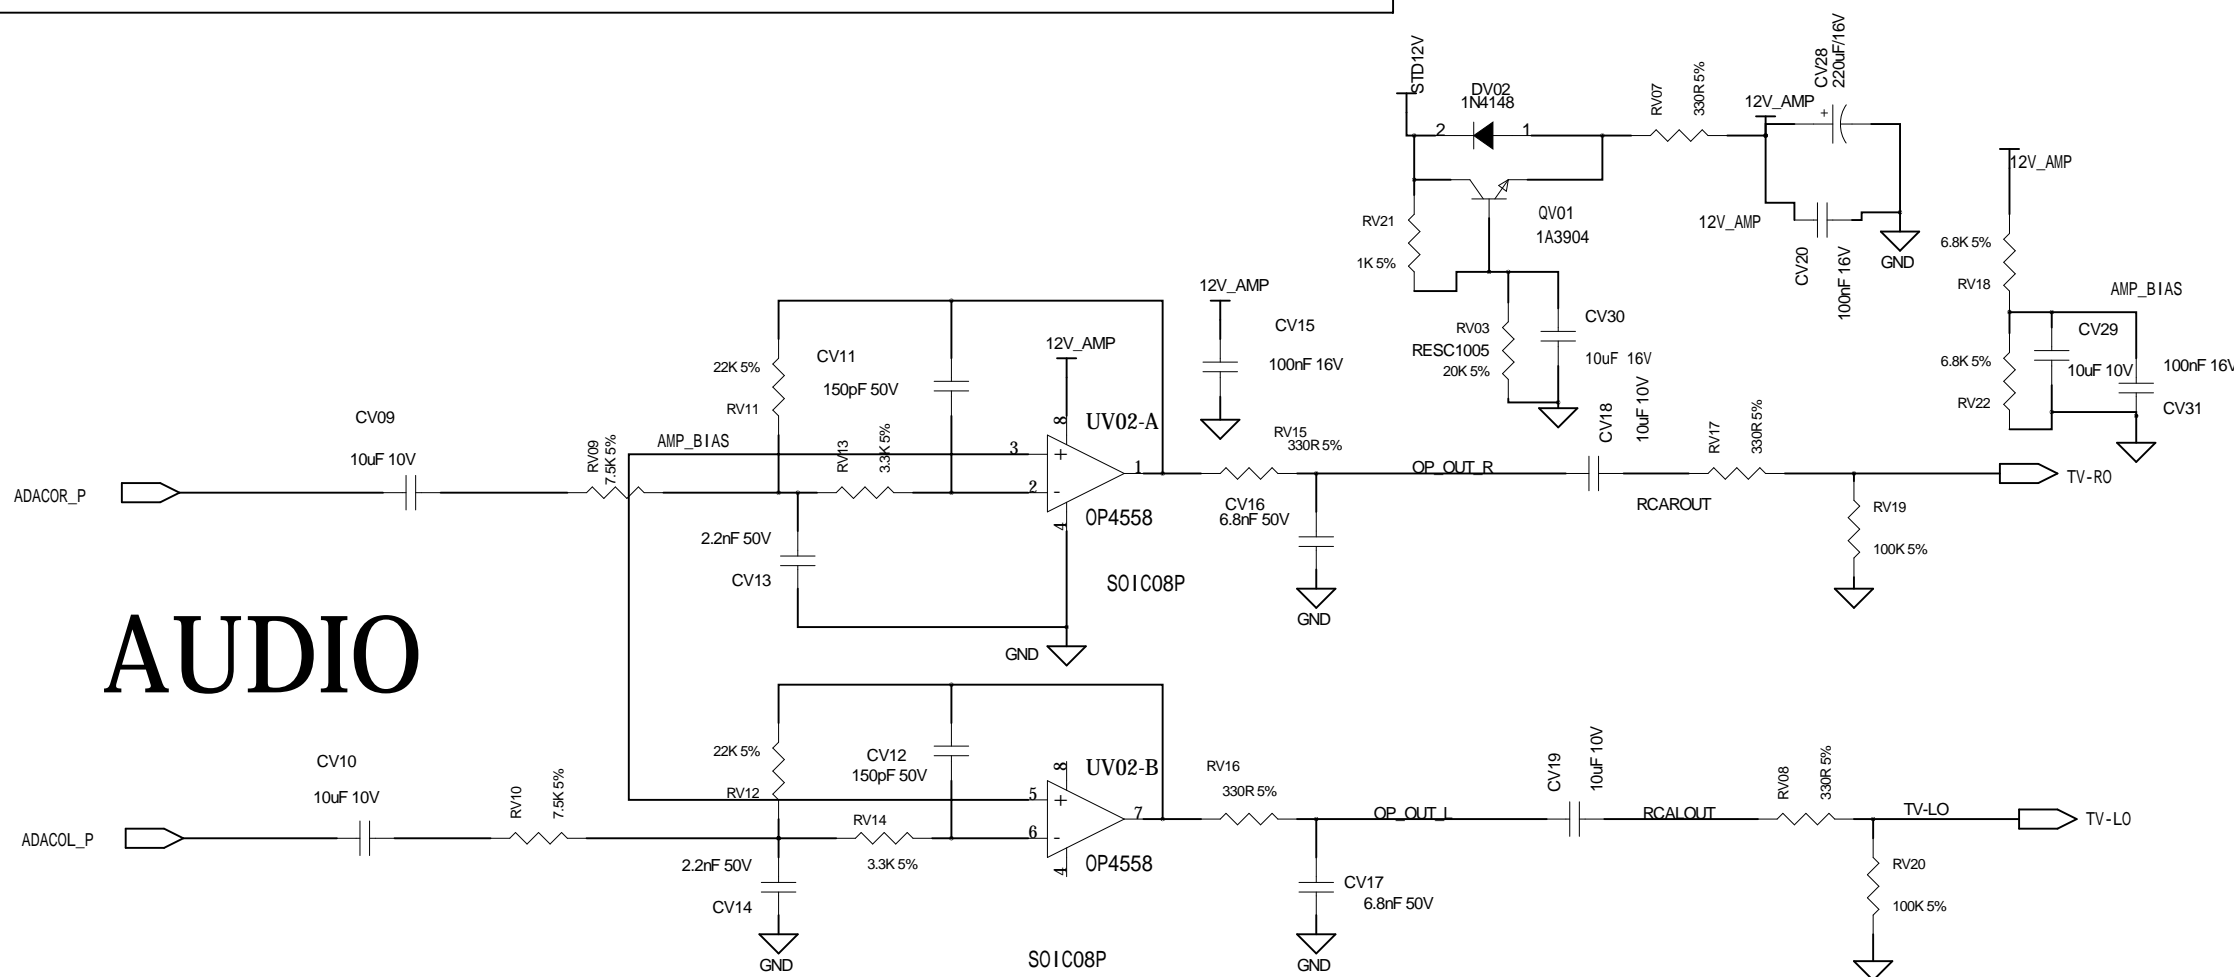


16:9 : GPI07 Set 1 ; 4:3 :GPI07 Set 0

STANDBY : GPI08 Set: 0


SPDIF

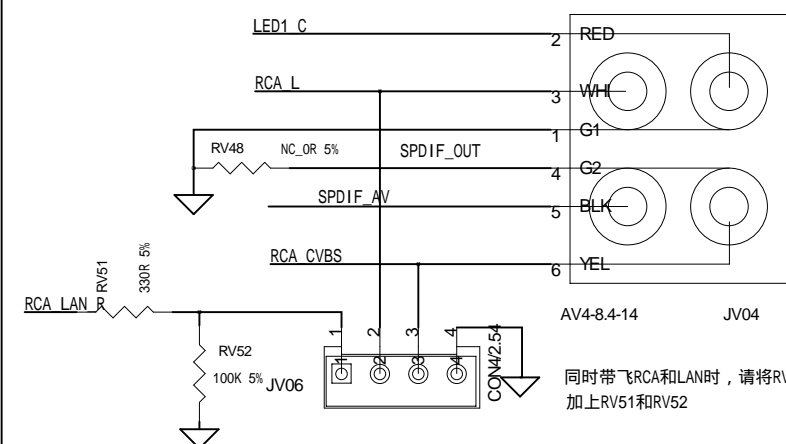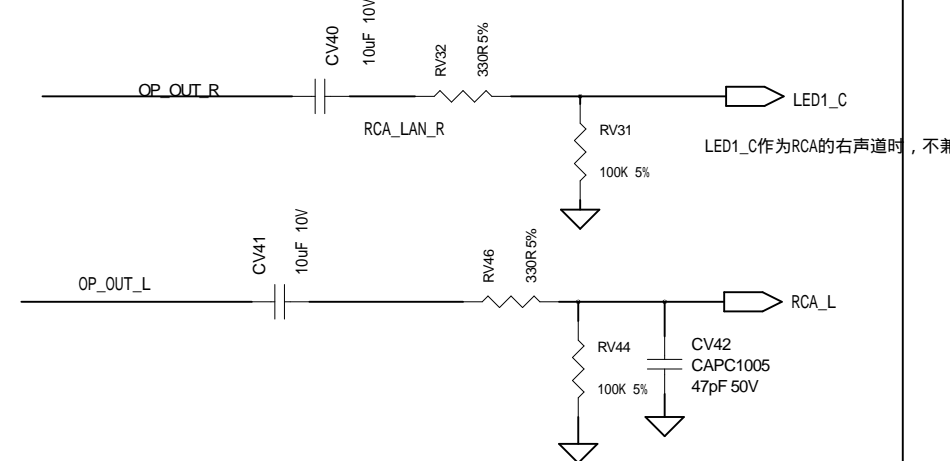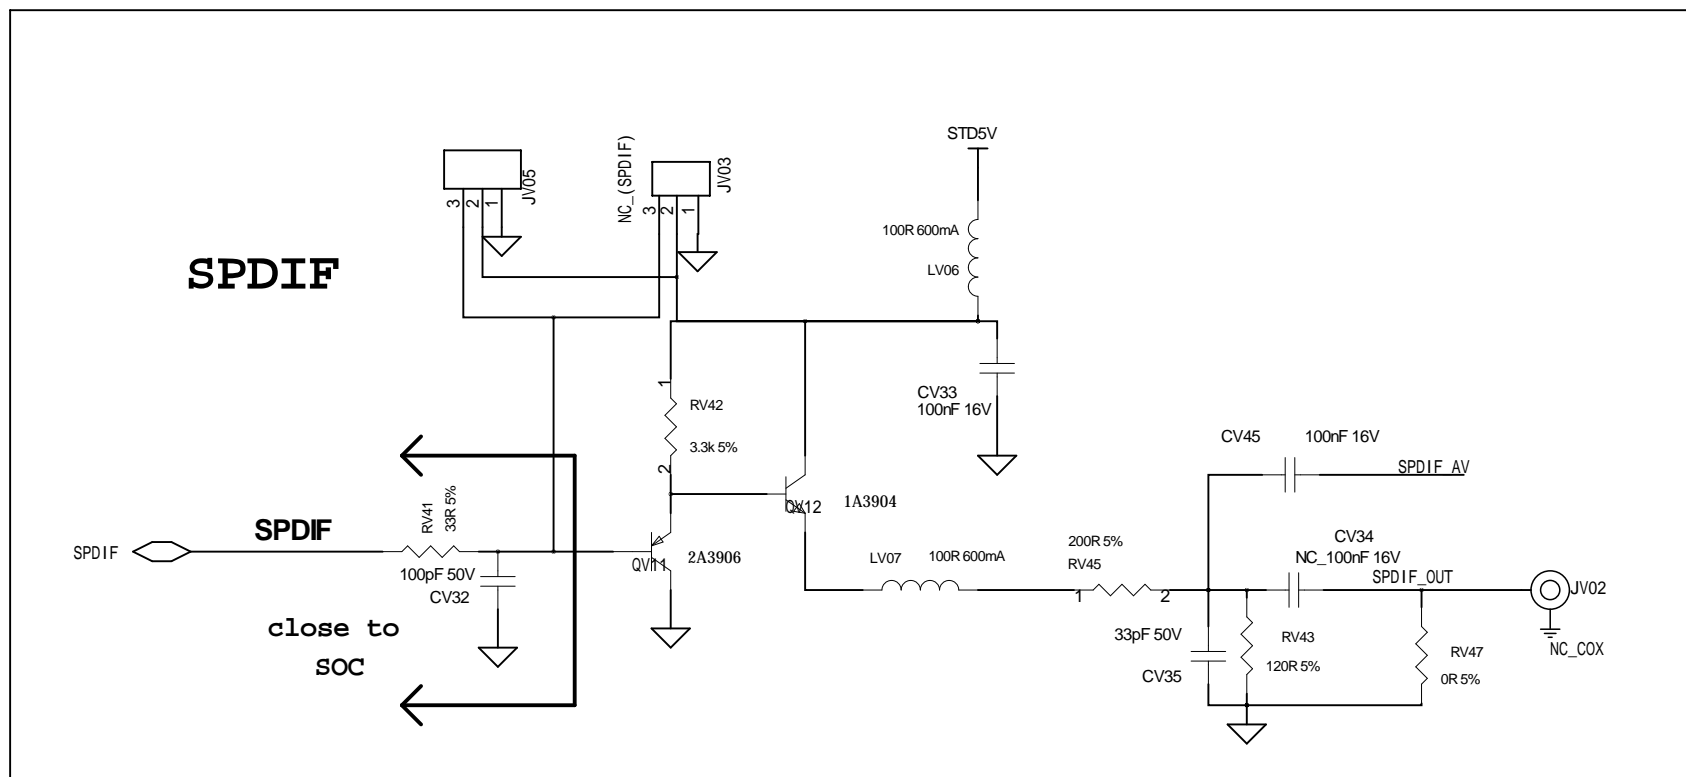

VFD or LED panel interface

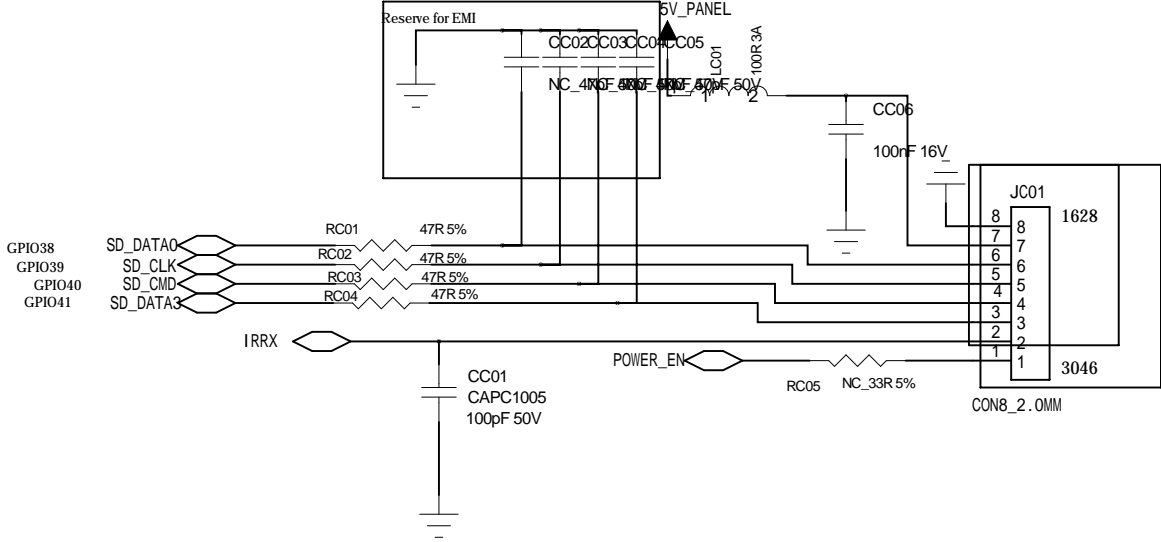

RS232

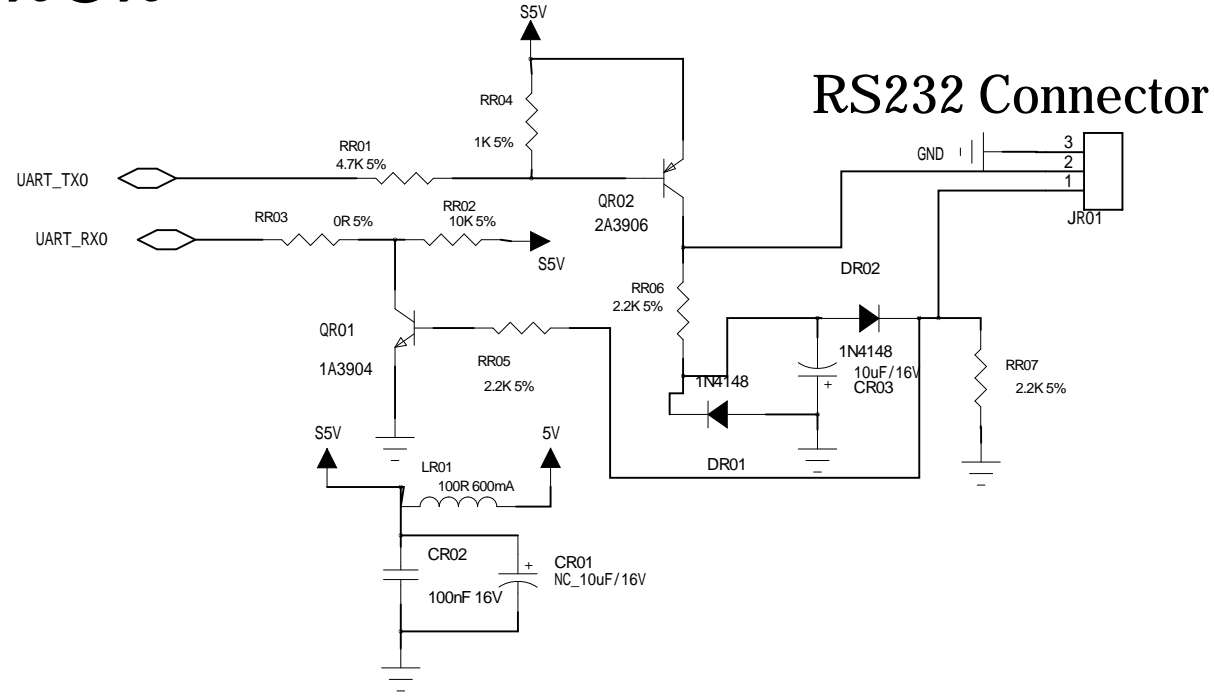

SMART CAR

| | | |
|---|-----------|-----------|
| | R890,R895 | R891,R894 |
| <p>If pin 9 and 10 is open when no card is inserted (NORMAL OPEN)</p> | Assemble | Remove |
| <p>If pin 9 and 10 is short when no card is inserted (NORMAL CLOSE)</p> | Remove | Assemble |

CA interface

